




PEGASUS

# New trend with M900neo

DP22 Series DP32 Series

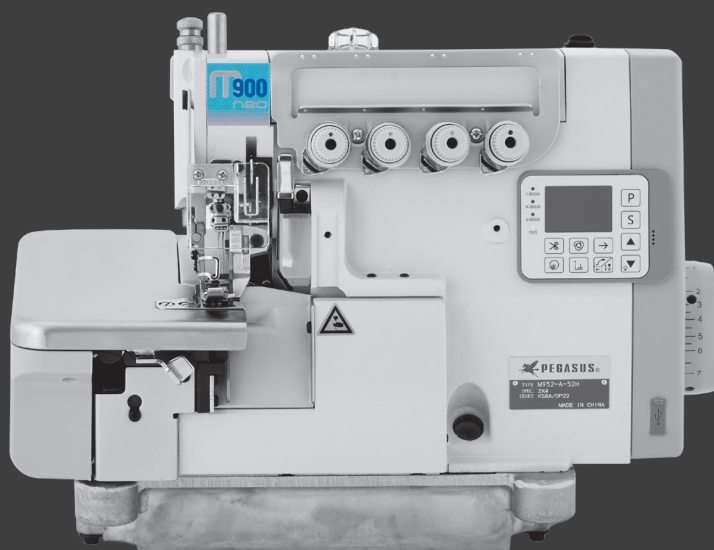

# New trend with M900neo

DP22 Series DP32 Series

**Built-in** Electronic Equipment  
Integrated Type

Safety Stitch Machines / Overlock



DP32 Series



DP22 Series

**Built-in** Direct Drive Motor  
**Integrated** operation panel and control box

# Built-in Electronic Equipment Integrated Type


## Safety Stitch Machines / Overlock

Intelligently integrated Smart & Stylish!

Energy Saving & Reduced Air Consumption

### Ready to Sew Right Out of the Box

With the sewing machine body integrated with a direct drive motor, control box, and operation panel, setup time and effort are greatly reduced.

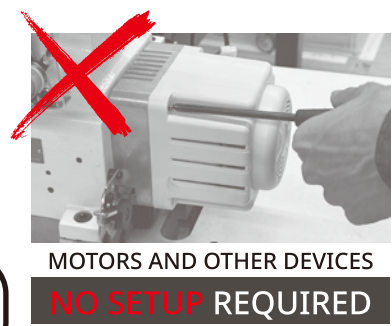

MOTORS AND OTHER DEVICES  
**NO SETUP REQUIRED**

COMPLIANT WITH EU STANDARDS.



Max. sewing speed  
**6,500**sti/min



**Block oil Stain!**  
Protects your sewn products from oil contamination.






Dual fabric sensors

**LED light** Illuminates the needle drop point with two color tones and five brightness levels.

**USB PORT**

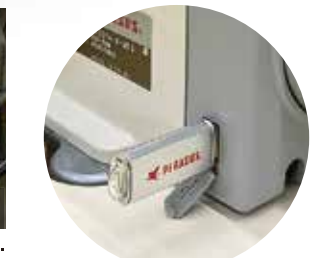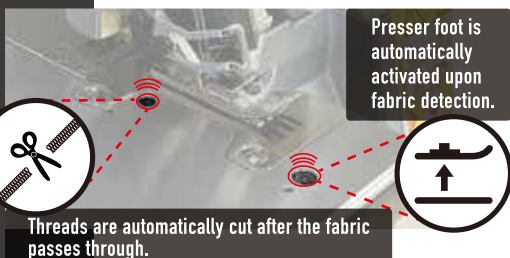

**Air saving** Air is activated only when needed — such as during fabric or thread trimming.

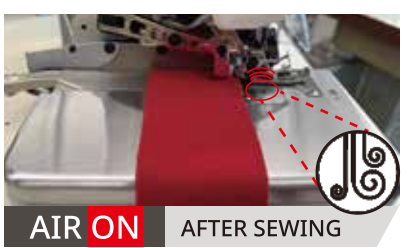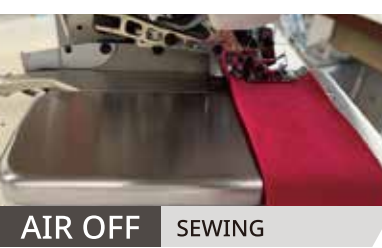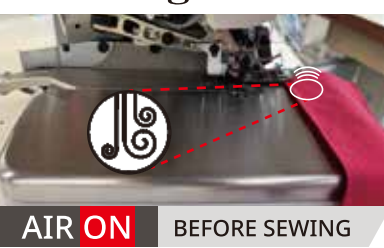

This reduces overall air consumption, helping to lower energy costs for the entire factory and contributing to environmental conservation and cost savings.

### Smart Devices Supporting Reliable Sewing



**Three safety sensors**

If any part of the machine is not properly set, the sensors detect the issue and prevent operation. This prevents malfunctions, ensures operator safety, and avoids machine trouble.



### Multilingual Operation Navigation

Multilingual voice-guided operation panel ensures smooth use and friendly.

**Voice guidance** (8languages)

ENGLISH, CHINESE, TURKISH, SPANISH, BENGALI, VIETNAMESE, PORTUGUESE, INDONESIAN



|      |      |      | MULTILINGUAL SUPPORT     | SENSOR                   | LED LIGHT                | VERTICAL TYPE VACUUM THREAD CHAIN CUTTER | FLAT TYPE VACUUM THREAD CHAIN CUTTER | AUTOMATIC TAPE CUTTER    | NEEDLE THREAD RELEASING DEVICE | AIR SAVING               | PRESSER FOOT LIFTER      | PNEUMATIC LINT COLLECTOR |
|------|------|------|--------------------------|--------------------------|--------------------------|------------------------------------------|--------------------------------------|--------------------------|--------------------------------|--------------------------|--------------------------|--------------------------|
| DP22 | M932 |      | ---                      | ---                      | <input type="checkbox"/> | ---                                      | ---                                  | ---                      | ---                            | ---                      | ---                      | ---                      |
|      | M952 |      | ---                      | ---                      | <input type="checkbox"/> | ---                                      | ---                                  | ---                      | ---                            | ---                      | ---                      | ---                      |
|      | M922 |      | ---                      | ---                      | <input type="checkbox"/> | ---                                      | ---                                  | ---                      | ---                            | ---                      | ---                      | ---                      |
| DP32 | M932 | KH8A | ---                      | ---                      | <input type="checkbox"/> | ---                                      | <input type="checkbox"/>             | ---                      | ---                            | ---                      | <input type="checkbox"/> | <input type="checkbox"/> |
|      | M952 | KS8A | ---                      | ---                      | <input type="checkbox"/> | <input type="checkbox"/>                 | ---                                  | ---                      | ---                            | ---                      | <input type="checkbox"/> | <input type="checkbox"/> |
|      | M932 | KH8D | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | ---                                      | <input type="checkbox"/>             | ---                      | ---                            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|      | M932 | KH8E | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | ---                                      | <input type="checkbox"/>             | ---                      | <input type="checkbox"/>       | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|      | M952 | KS8D | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>                 | ---                                  | ---                      | ---                            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|      | M952 | KS8E | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>                 | ---                                  | ---                      | <input type="checkbox"/>       | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|      | M952 | AT8G | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | ---                                      | ---                                  | <input type="checkbox"/> | ---                            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|      | M932 | AT6G | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | ---                                      | ---                                  | <input type="checkbox"/> | ---                            | ---                      | <input type="checkbox"/> | ---                      |
|      | M922 | AT6G | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | ---                                      | ---                                  | <input type="checkbox"/> | ---                            | ---                      | <input type="checkbox"/> | ---                      |

※ ☐ Standard included

# Built-in Electronic Equipment Integrated Type

## Safety Stitch Machines / Overlock

### M900-A/DP22 Series subclass specifications

























| Application                                  | Fabric weight | Subclass         | Number of needles | Number of threads | Needle space (mm) | Overedge width (mm) | Max. main feed dog's movement amount (mm) | Diff. feed ratio      | Presser foot lift (mm) | Max. sewing speed (stitches/minute) | Remarks                                     |
|----------------------------------------------|---------------|------------------|-------------------|-------------------|-------------------|---------------------|-------------------------------------------|-----------------------|------------------------|-------------------------------------|---------------------------------------------|
| Plain seaming                                | Medium        | M932-A-38/DP22   | 2                 | 5                 | 3                 | 4                   | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6500                                |                                             |
|                                              | Medium        | M932-A-44/DP22   | 2                 | 5                 | 3                 | 4                   | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6500                                |                                             |
|                                              | Medium        | M932-A-70/DP22   | 2                 | 5                 | 5                 | 5                   | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6500                                |                                             |
|                                              | Heavy         | M932-A-86/DP22   | 2                 | 5                 | 5                 | 6                   | 5.3                                       | 0.6-1.3               | 5.5                    | 5500                                | With caterpillar foot, for jeans            |
|                                              | Extra-heavy   | M932-A-86H/DP22  | 2                 | 5                 | 5                 | 6                   | 5.3                                       | 0.6-1.3               | 7.0                    | 5500                                | With caterpillar foot, for jeans            |
| Shirring                                     | Light-medium  | M932-A-48/DP22   | 2                 | 5                 | 3                 | 4                   | 3.3                                       | 1-2.8                 | 5.5                    | 5500                                | KH8A is not applicable                      |
| Shirring with piping                         | Light-medium  | M932-A-48P2/DP22 | 2                 | 5                 | 3                 | 4                   | 3.3                                       | 1-2.8                 | 5.0                    | 5000                                | KH8A is not applicable                      |
| 3-needle versatile machine for plain seaming | Medium        | M932-A-355/DP22  | 3                 | 6                 | 3+2               | 4                   | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6000                                | Available in 401,401+514,516,514,504        |
|                                              | Medium        | M932-A-551/DP22  | 3                 | 6                 | 5+2.5             | 3.5                 | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6000                                | For U-shaped tape<br>KH8A is not applicable |

### M952-A/DP22

|                     |              |                  |   |   |     |     |     |                       |     |      |                                                                                 |
|---------------------|--------------|------------------|---|---|-----|-----|-----|-----------------------|-----|------|---------------------------------------------------------------------------------|
| Blindstitch hemming | Light-medium | M952-A-01/DP22   | 1 | 3 | -   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 5.5 | 6500 |                                                                                 |
| Plain seaming       | Light-medium | M952-A-13/DP22   | 2 | 4 | 2   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 6   | 6500 | With presser foot for attaching tape                                            |
|                     |              |                  |   |   |     | 5   |     |                       |     |      |                                                                                 |
| Plain seaming       | medium-heavy | M952-A-13H/DP22  | 2 | 4 | 2   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 6   | 6000 | With presser foot for attaching tape<br>Overedge width 7(mm) KH9K is applicable |
|                     |              |                  |   |   |     | 5   |     |                       |     |      |                                                                                 |
|                     |              |                  |   |   |     | 7   |     |                       |     |      |                                                                                 |
| Turn down hemming   | Light        | M952-A-16S2/DP22 | 1 | 3 | -   | 1.5 | 3.7 | 0.7-1.7<br>See Note 1 | 5.5 | 6500 |                                                                                 |
| Plain seaming       | Light-medium | M952-A-17/DP22   | 1 | 3 | -   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 5.5 | 6500 |                                                                                 |
|                     | Extra-heavy  | M952-A-23B/DP22  | 2 | 4 | 2.5 | 4.5 | 2.7 | 1.2-3.5               | 7   | 6500 |                                                                                 |
|                     |              |                  |   |   |     |     |     |                       |     |      |                                                                                 |
|                     | Light-medium | M952-A-52/DP22   | 2 | 4 | 2   | 3   | 3.7 | 0.7-1.7<br>See Note 1 | 6   | 6500 | With presser foot for attaching tape                                            |
|                     |              |                  |   |   |     | 4   |     |                       |     |      |                                                                                 |
|                     |              |                  |   |   |     | 5   |     |                       |     |      |                                                                                 |
|                     | medium-heavy | M952-A-52H/DP22  | 2 | 4 | 2   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 6   | 6000 | With presser foot for attaching tape                                            |
|                     |              |                  |   |   |     | 5   |     |                       |     |      |                                                                                 |
| Butt-end sewing     | Light-medium | M952-A-90/DP22   | 1 | 2 | -   | 6   | 6.2 | 1                     | 3   | 5000 | KS8A is not applicable                                                          |
| Backlatching        | Light-medium | M952-A-180/DP22  | 1 | 3 | -   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 5.5 | 6500 | Backlatching (BT9B)                                                             |
|                     | Light-medium | M952-A-181/DP22  | 2 | 4 | 2   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 4.8 | 6500 | Backlatching (BT9C)                                                             |

### M922-A/DP22

|                |              |                |   |   |   |   |     |                       |     |      |  |
|----------------|--------------|----------------|---|---|---|---|-----|-----------------------|-----|------|--|
| Attaching tape | Light-medium | M922-A-02/DP22 | 2 | 4 | 5 | - | 3.7 | 0.7-1.7<br>See Note 2 | 3.5 | 6000 |  |
|----------------|--------------|----------------|---|---|---|---|-----|-----------------------|-----|------|--|

### M900-A/DP32 Series subclass specifications

























| Application                                  | Fabric weight | Subclass        | Number of needles | Number of threads | Needle space (mm) | Overedge width (mm) | Max. main feed dog's movement amount (mm) | Diff. feed ratio      | Presser foot lift (mm) | Max. sewing speed (stitches/minute) | Remarks                              |
|----------------------------------------------|---------------|-----------------|-------------------|-------------------|-------------------|---------------------|-------------------------------------------|-----------------------|------------------------|-------------------------------------|--------------------------------------|
| Plain seaming                                | Medium        | M932-A-38/DP32  | 2                 | 5                 | 3                 | 4                   | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6500                                |                                      |
|                                              | Medium        | M932-A-44/DP32  | 2                 | 5                 | 3                 | 4                   | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6500                                |                                      |
|                                              | Medium        | M932-A-70/DP32  | 2                 | 5                 | 5                 | 5                   | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6500                                |                                      |
|                                              | Heavy         | M932-A-86/DP32  | 2                 | 5                 | 5                 | 6                   | 5.3                                       | 0.6-1.3               | 5.5                    | 5500                                | With caterpillar foot, for jeans     |
|                                              | Extra-heavy   | M932-A-86H/DP32 | 2                 | 5                 | 5                 | 6                   | 5.3                                       | 0.6-1.3               | 7.0                    | 5500                                | With caterpillar foot, for jeans     |
| 3-needle versatile machine for plain seaming | Medium        | M932-A-355/DP32 | 3                 | 6                 | 3+2               | 4                   | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6000                                | Available in 401,401+514,516,514,504 |
|                                              | Medium        | M932-A-551/DP32 | 3                 | 6                 | 5+2.5             | 3.5                 | 3.7                                       | 0.7-1.7<br>See Note 1 | 5.5                    | 6000                                | For U-shaped tape                    |

### M952-A/DP32

|                   |              |                  |   |   |     |     |     |                       |     |      |                                      |
|-------------------|--------------|------------------|---|---|-----|-----|-----|-----------------------|-----|------|--------------------------------------|
| Plain seaming     | Light-medium | M952-A-13/DP32   | 2 | 4 | 2   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 6   | 6500 | With presser foot for attaching tape |
|                   |              |                  |   |   |     | 5   |     |                       |     |      |                                      |
| Plain seaming     | medium-heavy | M952-A-13H/DP32  | 2 | 4 | 2   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 6   | 6000 | With presser foot for attaching tape |
|                   |              |                  |   |   |     | 5   |     |                       |     |      |                                      |
| Turn down hemming | Light        | M952-A-16S2/DP32 | 1 | 3 | -   | 1.5 | 3.7 | 0.7-1.7<br>See Note 1 | 5.5 | 6500 |                                      |
|                   |              |                  |   |   |     |     |     |                       |     |      |                                      |
| Plain seaming     | Light-medium | M952-A-17/DP32   | 1 | 3 | -   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 5.5 | 6500 |                                      |
|                   | Extra-heavy  | M952-A-23B/DP32  | 2 | 4 | 2.5 | 4.5 | 2.7 | 1.2-3.5               | 7   | 6500 |                                      |
|                   |              |                  |   |   |     |     |     |                       |     |      |                                      |
|                   | Light-medium | M952-A-52/DP32   | 2 | 4 | 2   | 3   | 3.7 | 0.7-1.7<br>See Note 1 | 6   | 6500 | With presser foot for attaching tape |
|                   |              |                  |   |   |     | 4   |     |                       |     |      |                                      |
| Plain seaming     | medium-heavy | M952-A-52H/DP32  | 2 | 4 | 2   | 4   | 3.7 | 0.7-1.7<br>See Note 1 | 6   | 6000 | With presser foot for attaching tape |
|                   |              |                  |   |   |     | 5   |     |                       |     |      |                                      |
| Butt-end sewing   | Light-medium | M952-A-90/DP32   | 1 | 2 | -   | 6   | 6.2 | 1                     | 3   | 5000 |                                      |

### M922-A/DP32

|                |              |                |   |   |   |   |     |                       |     |      |  |
|----------------|--------------|----------------|---|---|---|---|-----|-----------------------|-----|------|--|
| Attaching tape | Light-medium | M922-A-02/DP32 | 2 | 4 | 5 | - | 3.7 | 0.7-1.7<br>See Note 2 | 3.5 | 6000 |  |
|----------------|--------------|----------------|---|---|---|---|-----|-----------------------|-----|------|--|

Note 1) If you use the machine with a differential feed ratio of more than 1:1.7, the main feed dog's movement amount should be less than 2.9 mm.  
(The maximum differential feed ratio is 1:2. If you use the machine with the maximum differential feed ratio, the upper limit reading for the differential feed ratio adjustment lever is 6.)

Note 2) Differential feed ratio 1:2 is available with maximum main feed dog movement amount at 2.9mm. Reading 6 is the upper limit for the differential feed adjusting lever with main feed dog movement amount at 2.9mm.

Note 3) For DP32, install either KH8D, KH8E, AT66, AT86.

# M9000 neo

New trend with

## PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan  
TEL : +81-6-6458-4739 FAX : +81-6-6454-8785



-Specifications and appearance are subjected to changes without notice.  
-Read the instruction manual before operating the machine to ensure safe usage.  
-Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

© 2025 PEGASUS CO., LTD. Catalog NO.103303 May 2025

