

Pegasus M900neo Series

Overlock and safety stitch machines

Catalogue (PDF)

Catalogue et fiche technique (PDF)

The maker's catalogue follows on pages 2 to 6.

Al Borj Machinery supplies, installs and services these machines from Sharjah, UAE, and Accra, Ghana.

Models in this catalogue

Product page

M932	alborj.com/products/pegasus-m932
M952	alborj.com/products/pegasus-m952



Page 2, the first page of the maker's catalogue, reproduced unchanged.

In this catalogue


- | | |
|---|--|
| 2 | Front page: the M900neo DP22 and DP32 series |
| 3 | The M900neo with built-in electronic equipment, DP22 and DP32 series |
| 4 | Features: ready to sew, smart devices and specifications |
| 5 | Subclass list and specifications of the M900-A/DP22 and DP32 |
| 6 | Back page with the maker's contacts |
| 7 | AED price, delivery and installation: our offices in Sharjah and Accra |



PEGASUS

New trend with M900neo

DP22 Series DP32 Series

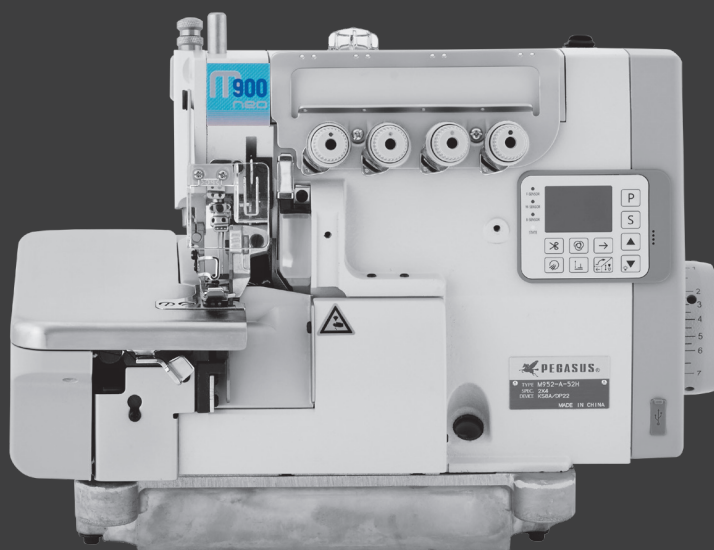

New trend with M900neo

DP22 Series DP32 Series

Built-in Electronic Equipment
Integrated Type

Safety Stitch Machines / Overlock



DP32 Series



DP22 Series

Built-in Direct Drive Motor
Integrated operation panel and control box

Built-in Electronic Equipment Integrated Type



Safety Stitch Machines / Overlock

Intelligently integrated Smart & Stylish!

Energy Saving & Reduced Air Consumption

Ready to Sew Right Out of the Box

With the sewing machine body integrated with a direct drive motor, control box, and operation panel, setup time and effort are greatly reduced.

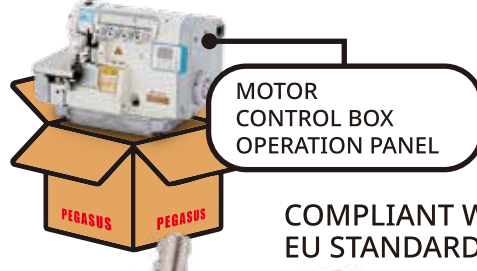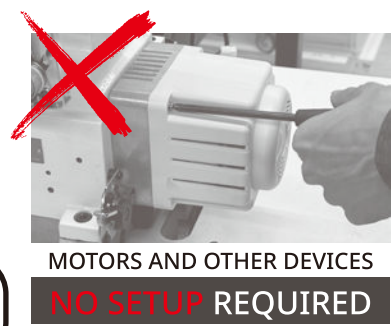


COMPLIANT WITH EU STANDARDS.

Max. sewing speed 6,500sti/min

Block oil stain! Block oil Stain! Protects your sewn products from oil contamination.



Dual fabric sensors DP32

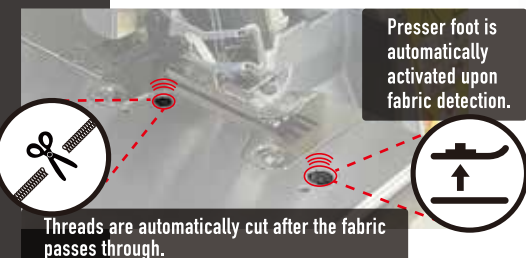


LED light Illuminates the needle drop point with two color tones and five brightness levels.



USB PORT



Air saving DP32 Air is activated only when needed — such as during fabric or thread trimming.

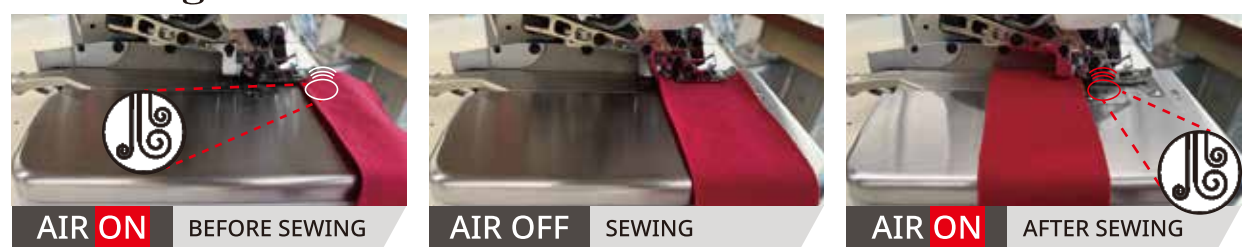

This reduces overall air consumption, helping to lower energy costs for the entire factory and contributing to environmental conservation and cost savings.

Smart Devices Supporting Reliable Sewing



Three safety sensors DP32

If any part of the machine is not properly set, the sensors detect the issue and prevent operation. This prevents malfunctions, ensures operator safety, and avoids machine trouble.



Multilingual Operation Navigation

Multilingual voice-guided operation panel ensures smooth use and friendly.

Voice guidance (8languages) ENGLISH, CHINESE, TURKISH, SPANISH, BENGALI, VIETNAMESE, PORTUGUESE, INDONESIAN



			MULTILINGUAL SUPPORT	SENSOR	LED LIGHT	KS VERTICAL TYPE VACUUM THREAD CHAIN CUTTER	KH FLAT TYPE VACUUM THREAD CHAIN CUTTER	AT AUTOMATIC TAPE CUTTER	SC NEEDLE THREAD RELEASING DEVICE	AIR SAVING	PL PRESSER FOOT LIFTER	LC PNEUMATIC LINT COLLECTOR
DP22	M932		---	---	☐	---	---	---	---	---	---	---
	M952		---	---	☐	---	---	---	---	---	---	---
	M922		---	---	☐	---	---	---	---	---	---	---
DP32	M932	KH8A	---	---	☐	---	☐	---	---	---	☐	☐
	M952	KS8A	---	---	☐	☐	---	---	---	---	☐	☐
	M932	KH8D	☐	☐	☐	---	☐	---	---	☐	☐	☐
		KH8E	☐	☐	☐	---	☐	---	☐	☐	☐	☐
	M952	KS8D	☐	☐	☐	☐	---	---	---	☐	☐	☐
		KS8E	☐	☐	☐	☐	---	---	☐	☐	☐	☐
	M952	AT8G	☐	☐	☐	---	---	☐	---	☐	☐	☐
	M922	AT6G	☐	☐	☐	---	---	☐	---	---	☐	---

※ ☐ Standard included

Built-in Electronic Equipment Integrated Type

Safety Stitch Machines / Overlock

M900-A/DP22 Series subclass specifications



M932-A/DP22

Application	Fabric weight	Subclass	Number of needles	Number of threads	Needle space (mm)	Overedge width (mm)	Max. main feed dog's movement amount (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. sewing speed (stitches/minute)	Remarks
Plain seaming	Medium	M932-A-38/DP22	2	5	3	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Medium	M932-A-44/DP22	2	5	3	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Medium	M932-A-70/DP22	2	5	5	5	3.7	0.7-1.7 See Note 1	5.5	6500	
	Heavy	M932-A-86/DP22	2	5	5	6	5.3	0.6-1.3	5.5	5500	With caterpillar foot, for jeans
	Extra-heavy	M932-A-86H/DP22	2	5	5	6	5.3	0.6-1.3	7.0	5500	With caterpillar foot, for jeans
Shirring	Light-medium	M932-A-48/DP22	2	5	3	4	3.3	1-2.8	5.5	5500	KH8A is not applicable
Shirring with piping	Light-medium	M932-A-48P2/DP22	2	5	3	4	3.3	1-2.8	5.0	5000	KH8A is not applicable
3-needle versatile machine for plain seaming	Medium	M932-A-355/DP22	3	6	3+2	4	3.7	0.7-1.7 See Note 1	5.5	6000	Available in 401,401+514,516,514,504
	Medium	M932-A-551/DP22	3	6	5+2.5	3.5	3.7	0.7-1.7 See Note 1	5.5	6000	For U-shaped tape KH8A is not applicable



M900-A/DP32 Series subclass specifications



M932-A/DP32

Application	Fabric weight	Subclass	Number of needles	Number of threads	Needle space (mm)	Overedge width (mm)	Max. main feed dog's movement amount (mm)	Diff. feed ratio	Presser foot lift (mm)	Max. sewing speed (stitches/minute)	Remarks
Plain seaming	Medium	M932-A-38/DP32	2	5	3	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Medium	M932-A-44/DP32	2	5	3	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Medium	M932-A-70/DP32	2	5	5	5	3.7	0.7-1.7 See Note 1	5.5	6500	
	Heavy	M932-A-86/DP32	2	5	5	6	5.3	0.6-1.3	5.5	5500	With caterpillar foot, for jeans
	Extra-heavy	M932-A-86H/DP32	2	5	5	6	5.3	0.6-1.3	7.0	5500	With caterpillar foot, for jeans
3-needle versatile machine for plain seaming	Medium	M932-A-355/DP32	3	6	3+2	4	3.7	0.7-1.7 See Note 1	5.5	6000	Available in 401,401+514,516,514,504
	Medium	M932-A-551/DP32	3	6	5+2.5	3.5	3.7	0.7-1.7 See Note 1	5.5	6000	For U-shaped tape



M952-A/DP22

Blindstitch hemming	Light-medium	M952-A-01/DP22	1	3	-	4	3.7	0.7-1.7 See Note 1	5.5	6500	
Plain seaming	Light-medium	M952-A-13/DP22	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6500	With presser foot for attaching tape
						5					
Plain seaming	medium-heavy	M952-A-13H/DP22	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6000	With presser foot for attaching tape Overedge width 7(mm) KH9K is applicable
						5					
						7					
Turn down hemming	Light	M952-A-16S2/DP22	1	3	-	1.5	3.7	0.7-1.7 See Note 1	5.5	6500	
Plain seaming	Light-medium	M952-A-17/DP22	1	3	-	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Extra-heavy	M952-A-23B/DP22	2	4	2.5	4.5	2.7	1.2-3.5	7	6500	
	Light-medium	M952-A-52/DP22	2	4	2	3	3.7	0.7-1.7 See Note 1	6	6500	With presser foot for attaching tape
						4					
						5					
	medium-heavy	M952-A-52H/DP22	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6000	With presser foot for attaching tape
						5					
Butt-end sewing	Light-medium	M952-A-90/DP22	1	2	-	6	6.2	1	3	5000	KS8A is not applicable
Backlatching	Light-medium	M952-A-180/DP22	1	3	-	4	3.7	0.7-1.7 See Note 1	5.5	6500	Backlatching (BT9B)
	Light-medium	M952-A-181/DP22	2	4	2	4	3.7	0.7-1.7 See Note 1	4.8	6500	Backlatching (BT9C)

M922-A/DP22

Attaching tape	Light-medium	M922-A-02/DP22	2	4	5	-	3.7	0.7-1.7 See Note 2	3.5	6000	
----------------	--------------	----------------	---	---	---	---	-----	-----------------------	-----	------	--

M952-A/DP32

Plain seaming	Light-medium	M952-A-13/DP32	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6500	With presser foot for attaching tape
						5					
Plain seaming	medium-heavy	M952-A-13H/DP32	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6000	With presser foot for attaching tape
						5					
Turn down hemming	Light	M952-A-16S2/DP32	1	3	-	1.5	3.7	0.7-1.7 See Note 1	5.5	6500	
Plain seaming	Light-medium	M952-A-17/DP32	1	3	-	4	3.7	0.7-1.7 See Note 1	5.5	6500	
	Extra-heavy	M952-A-23B/DP32	2	4	2.5	4.5	2.7	1.2-3.5	7	6500	
	Light-medium	M952-A-52/DP32	2	4	2	3	3.7	0.7-1.7 See Note 1	6	6500	With presser foot for attaching tape
						4					
Plain seaming	medium-heavy	M952-A-52H/DP32	2	4	2	4	3.7	0.7-1.7 See Note 1	6	6000	With presser foot for attaching tape
						5					
Butt-end sewing	Light-medium	M952-A-90/DP32	1	2	-	6	6.2	1	3	5000	

M922-A/DP32

Attaching tape	Light-medium	M922-A-02/DP32	2	4	5	-	3.7	0.7-1.7 See Note 2	3.5	6000	
----------------	--------------	----------------	---	---	---	---	-----	-----------------------	-----	------	--

Note 1) If you use the machine with a differential feed ratio of more than 1:1.7, the main feed dog's movement amount should be less than 2.9 mm.
(The maximum differential feed ratio is 1:2. If you use the machine with the maximum differential feed ratio, the upper limit reading for the differential feed ratio adjustment lever is 6.)
Note 2) Differential feed ratio 1:2 is available with maximum main feed dog movement amount at 2.9mm. Reading 6 is the upper limit for the differential feed adjusting lever with main feed dog movement amount at 2.9mm.
Note 3) For DP32, install either KH8D, KH8E, AT66, AT86.

M9000 neo

New trend with

PEGASUS CO., LTD.

5-7-2 Sagisu Fukushima-ku, Osaka 553-0002 Japan
TEL : +81-6-6458-4739 FAX : +81-6-6454-8785



-Specifications and appearance are subjected to changes without notice.
-Read the instruction manual before operating the machine to ensure safe usage.
-Photos for illustration purpose. They may not represent actual operating conditions and/or displayed optional parts.

© 2025 PEGASUS CO., LTD. Catalog NO.103303 May 2025



Ask for the AED price, delivery and installation

Send us the model and your country. Our team replies on WhatsApp or by email, and installs and services these machines from Sharjah and Accra.

WhatsApp

+971 6 533 3413

Email

info@alborj.com

Sharjah, UAE

Head office and showroom

Showroom #4, Al Borj Showrooms, Industrial Area 4,
P.O. Box 28551, Sharjah

+971 6 533 3413

info@alborj.com

Accra, Ghana

West Africa office

1 Kpentenplebi Link, Dzorwulu, Accra

+233 591 896 086

ghana@alborj.com

Pegasus M932

alborj.com/products/pegasus-m932

Pegasus M952

alborj.com/products/pegasus-m952

More catalogues

alborj.com/pages/catalogues